

# RIDGEBACK™ RAMP

**TECHNICAL SPECIFICATION**

AVAILABLE IN 2" and 3" HEIGHTS

**SITE, FACILITY & TRAFFIC MANAGEMENT**

## INSTRUCTIONS FOR USE

Position the units at the end of a row and mark the location of the fixing holes on the surface to be applied to


Remove units and drill holes at the marked positions as follows:  
Clean hole of debris

Insert bolt shield into hole


Reposition units and pass the bolts through the locating holes and screw into the shield

The instructions above are based on using the fitting kits available from JSP only - Other fittings may require different sizes and depths

It is responsibility of the Landowner/Leaseholder to place appropriate signage to indicate the speed limit at which the Speed Bumps should be approached

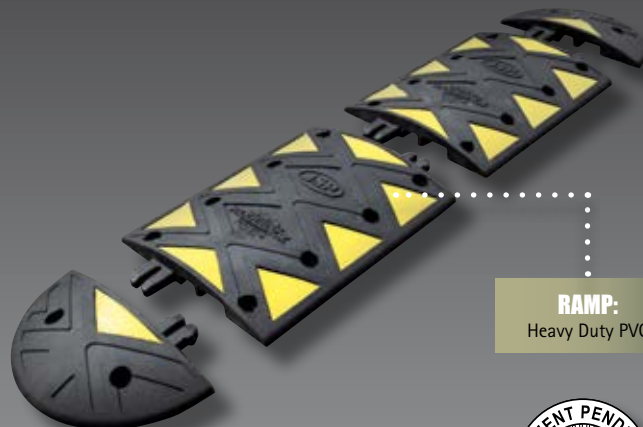

**RAMP:**  
Heavy Duty PVC



## APPLICATIONS FOR RIDGEBACK™ RAMP

2" ramps are designed to prevent incidents in and around the workplace, reducing speed to a maximum of 10mph, ideal for reception car parks, schools, colleges, hospitals etc

3" ramps are aimed to reduce speed to a maximum of 5mph, ideal for dock yards, loading bays, bus depts etc

## LIMITATIONS OF USE

Temporary Speed Restrictors are not for use on Public Roads

Damage to vehicle components is possible if the speed bumps are approached at speeds higher than recommended

## RIDGEBACK™ RAMP FEATURES

**Interlocking:** Each section has an integral interlocking facility for ease of siting and installation

**Reflectors:** Thermoplastic retro-reflective elements offer increased area of reflectivity compared to traditional styles of speed ramps

**Hose/Cables Channel:** Channel on the underside allowing for hose/cables to be safely accommodated through the speed ramp

**Distinctive Design:** Speed ramps and end caps are symmetrical in design for ease of installation, design optimises visibility for road users

**Easy Assembly:** Easy to assemble with optimal additional anchor points for improved stability

## RIDGEBACK™ RAMP PRODUCT CODES AND DIMENSIONS

Product Code:	Description:	Dimensions:	Quantity:
HAX002-135-330	3" speed bump (5mph)	H 3", L 20", W 16", 35Lbs	1 Unit
HAY002-835-330	3" end caps (5mph)	H 3", L 8", W 16", 20Lbs	1 Unit
HAX002-125-330	2" speed bump (10mph)	H 2", L 20", W 16", 18Lbs	1 Unit
HAY002-825-330	2" end caps (10mph)	H 2", L 8", W 16", 10Lbs	1 Unit

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jsp.co.uk](mailto:technical@jsp.co.uk)



**MANUFACTURING FOR SAFETY**  
[www.jspna.com](http://www.jspna.com)

[sales@jspna.com](mailto:sales@jspna.com)  
Tel: 833-JSP-SAFE



Issued 03/10/2020 - 3